

ER 308L

Stainless Steel WIRE/GTAW


Standards

EN/ISO-Standard - 14343-A
EN/ISO-Classification - W 19 9 L

AWS-Standard - A5.9
AWS-Classification - ER 308L

Features and Applications

- Austenitic stainless steel wire that has a low carbon content, which reduces the possibilities of intergranular carbide precipitation, while increasing the resistance to intergranular corrosion without the use of stabilisers such as niobium or titanium.
- Offers good corrosion resistance in nitric acid environments.
- Good mechanical properties at sub-zero temperatures down to -197°C.
- Typically used on applications where a good atmospheric corrosion resistance in urban and rural medias is expected, pipes/tubes, boiler engineering, food processing and chemical industries etc.
- **Test Certificates can be found online @wilkinsonstar247.com**

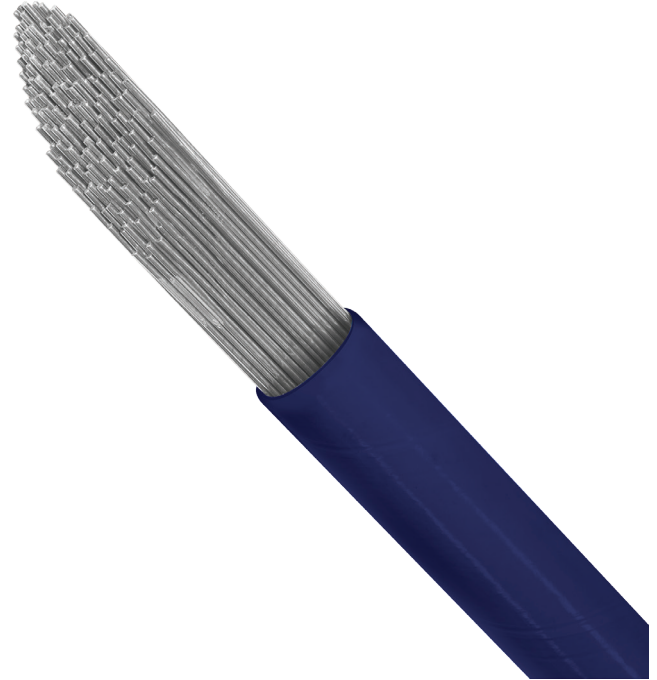

Typical Base Materials

All 300 series austenitic stainless steel*

* Illustrative, not exhaustive list

Welding Positions

EN ISO 6947 - PA, PB, PC, PD, PE, PF, PG

Shielding Gases

EN ISO 14175 - TIG: I1 (Argon)

Polarity

DC (-)

Mechanical Properties

Tensile Strength (N/mm ²)	Yield Strength (N/mm ²)	Elongation (%)	Impact Strength (J)
≥510	≥320	≥25	≥80

Mechanical properties are approximate and may vary based on the heat, shielding gas, welding parameters and other factors.

Chemical Composition % (Typical)

C %	Mn %	Si %	S %	P %	Ni %	Cr %	Mo %	Cu %
0.021	1.80	0.43	0.005	0.027	11.19	18.70	2.62	0.30

Packaging Data

Part No.	Diameter Ø (mm)	Package Length (mm)	Package Weight (Kg)	Package Type
6011100424	1.00	1000	5	Cardboard Tube
6011100321	1.20	1000	5	Cardboard Tube
6011100326	1.60	1000	5	Cardboard Tube
6011100328	2.40	1000	5	Cardboard Tube
6011100329	3.20	1000	5	Cardboard Tube

Liability: Whilst all reasonable efforts have been made to ensure the accuracy of the information contained, this information is subject to change without notice and can be only considered as suitable for general guidance.

