

ER 312

Stainless Steel WIRE/GTAW


Standards

EN/ISO-Standard - 14343-A
EN/ISO-Classification - W 29 9

AWS-Standard - A5.9
AWS-Classification - ER 312

Features and Applications

- Austenitic stainless steel wire originally designed to weld cast alloys of similar composition.
- It gives a two-phase weld deposit with substantial percentages of ferrite in austenite matrix.
- Ideal for welding dissimilar metals such as carbon steel to stainless steel, particularly those grades high in nickel.
- Due to its high ferrite level, ER 312 is very adapted to heterogeneous welding, especially when one of the components is fully austenitic.
- Good corrosion oxidation resistance at high temperature due to its high content of Cr.
- Service temperatures should be below 420°C to prevent formation of secondary brittle phases.
- Typically used on industrial furnaces, annealing chambers, fused salt treatment installations and boiler parts, as well as heat exchangers etc.
- **Test Certificates can be found online @wilkinsonstar247.com**

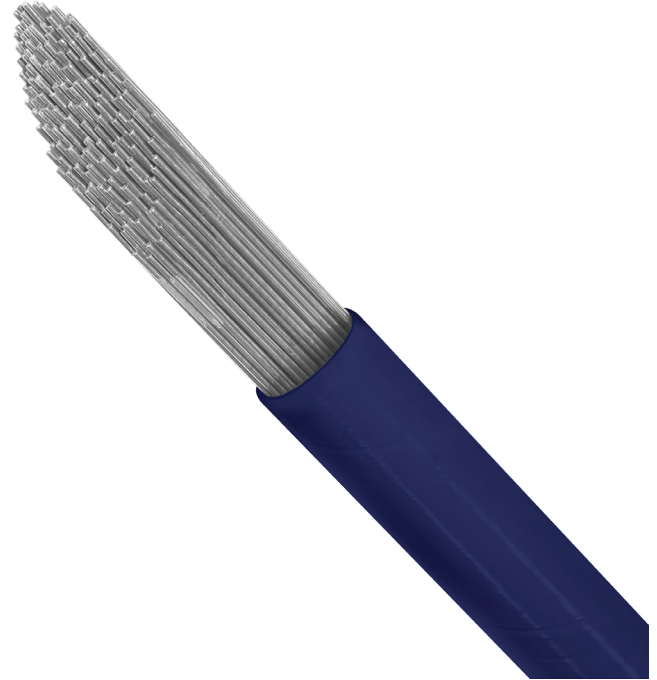

Typical Base Materials

Mild and low alloy steels, stainless steel of similar composition, Buffer layers, armor plate, 409, 304, difficult to weld steels such as; 25CrMo4, 42CrMo4, 50CrMo4, 42MnV7, 1.7218, 1.7225, 1.7228, 1.7223, AISI: 4130, 4140, 4150, C45, C60, tool steel repairs etc*

* Illustrative, not exhaustive list

Welding Positions

EN ISO 6947 - PA, PB, PC, PD, PE, PF, PG

Shielding Gases

EN ISO 14175 - TIG: I1 (Argon)

Polarity

DC (-)

Mechanical Properties

Tensile Strength (N/mm ²)	Yield Strength (N/mm ²)	Elongation (%)
≥650	≥450	≥15

Mechanical properties are approximate and may vary based on the heat, shielding gas, welding parameters and other factors.

Chemical Composition % (Typical)

C %	Mn%	Si %	S %	P %	Ni %	Cr %	Mo %	Cu%
0.091	1.59	0.46	0.004	0.021	20.68	26.65	0.040	0.21

Packaging Data

Part No.	Diameter Ø (mm)	Package Length (mm)	Package Weight (Kg)	Package Type
6011100157	1.60	1000	5	Cardboard Tube
6011100345	2.40	1000	5	Cardboard Tube
6011100346	3.20	1000	5	Cardboard Tube

Liability: Whilst all reasonable efforts have been made to ensure the accuracy of the information contained, this information is subject to change without notice and can be only considered as suitable for general guidance.

